



ASH HANDLING Department
SIMHADRI

Note No :1

Ref:SMTTP/ASH HANDLING/2024-25/CPCLMI/860633

Date:

17/01/2025(12:16:07)

Subject:REVIEW AND APPROVAL OF LMI ON MAINTENANCE
PAINTING OF STEEL STRUCTURES EQUIPMENTS AND PIPELINES IN
NTPC SIMHADRI

**SUBJECT - REVIEW & APPROVAL OF LMI ON MAINTENANCE PAINTING OF STEEL
STRUCTURES, EQUIPMENTS AND PIPELINES IN NTPC SIMHADRI**

The LMI (LMI/OGN/OPS/SYST/028/ISSUE NO.2, REVISION No.-2, DATED: MAY' 2023) for "Maintenance Painting of Steel Structures, Equipments and Pipelines in NTPC Simhadri" is attached in Annexures. The LMI is reviewed and modified for complying to external audit point. Also, the formatting is updated to latest LMI format as per LMI/OIN/GEN/002 Rev: 04.

The LMI referred above is reviewed. Changes suggested are as follows:

- External Audit Point - In page "LMI Approval Document", Page 02 , Approved By changed to HOP(Simhadri).
- LMI format changed to latest LMI format as per - LMI/OIN/GEN/002 Rev: 04.

The revision copy, LMI/OGN/OPS/SYST/028/Rev 03, Jan'2025, is also attached in annexures.

Submitted for kind perusal and approval please.

Submitted by:

तन्मय सिन्हा - उप महाप्रबंधक

TANMOY SINHA - 101612 (DY. GENERAL MANAGER ,ASH HANDLING) ,Simhadri

(TANMOYSINHA@NTPC.CO.IN, 9434737629)

On:17/01/2025(12:16:07) **Ref:**SMTPP/ASH HANDLING/2024-25/CPCLMI/860633

Note No:2

In respect of compliance of LMI External audit proposal may be approved.

May be approved pls

Submitted by:

संदीप गोप - उप महाप्रबंधक

SANDEEP GOPE - 042182 (DY. GENERAL MANAGER ,ASH HANDLING)

(SANDEEPGOPE@NTPC.CO.IN, 9434018776) ,Simhadri

On:17/01/2025(12:37:59) **Ref:**SMTPP/ASH HANDLING/2024-25/CPCLMI/860633

Note No:3

May please be approved.

Submitted by:

राजेश चावला - अपर महाप्रबंधक

Rajesh Chawla - 007383 (ADDL. GENERAL MANAGER ,ASH HANDLING)

(RAJESHCHAWLA@NTPC.CO.IN, 9425534528) ,Simhadri

On:17/01/2025(17:30:45) **Ref:**SMTPP/ASH HANDLING/2024-25/CPCLMI/860633

Note No:4

Make front page LMI font as per standard format,

Mention HOP Simhadri in place of clause no. 10 : Review,

Add Clause 10 for checklist mentioning Annexures attached & modify index as per LMI content

Submitted by:

अजय गुप्ता - उप महाप्रबंधक

Ajay Gupta - 008565 (DY. GENERAL MANAGER ,EEMG)

(AJAYGUPTA04@NTPC.CO.IN, 9958105993) ,Simhadri

On:18/01/2025(09:51:09) **Ref:**SMTPP/ASH HANDLING/2024-25/CPCLMI/860633

Note No:5

All changes suggested in Note No. 4 incorporated.

Same attached.

Submitted by:

तन्मय सिन्हा - उप महाप्रबंधक

TANMOY SINHA - 101612 (DY. GENERAL MANAGER ,ASH HANDLING)

(TANMOYSINHA@NTPC.CO.IN, 9434737629) ,Simhadri

On:18/01/2025(11:54:06) **Ref:**SMTPP/ASH HANDLING/2024-25/CPCLMI/860633

Note No:6

Observation in the External Audit was "LMI Approval authority is written as GM(O&M) instead of HOP. To be corrected."

Necessary correction has been done in the attached Documents "LMI OGN OPS SYST 028 Rev 03, Jan 2025.pdf".

Revised LMI may please be approved.

Submitted by:

नवीन किशोर - अपर महाप्रबंधक

Navin Kishore - 006964 (ADDL. GENERAL MANAGER ,EEMG)
(NAVINKISHORE@NTPC.CO.IN, 9650990460) ,Simhadri

On:20/01/2025(10:26:33) **Ref:**SMTPP/ASH HANDLING/2024-25/CPCLMI/860633

Note No:7

Reviewed and submitted for approval please

Submitted by:

ओम प्रकाश - अपर महाप्रबंधक

Om Prakash - 007105 (ADDL. GENERAL MANAGER ,MAINTENANCE)
(OMPRAKASH08@NTPC.CO.IN, 9650994070) ,Simhadri

On:21/01/2025(09:41:22) **Ref:**SMTPP/ASH HANDLING/2024-25/CPCLMI/860633

Note No:8

Submitted by:

प्रसन्ता कुमार जेना - महाप्रबंधक

Prasanta Kumar Jena - 006081 (GENERAL MANAGER ,O & M)
(PKJENA@NTPC.CO.IN, 9650990836) ,Simhadri

On:21/01/2025(16:21:48) **Ref:**SMTPP/ASH HANDLING/2024-25/CPCLMI/860633

Note No:9

Observation in the External Audit was "**LMI Approval authority is written as GM(O&M) instead of HOP. To be corrected.**"

Necessary correction has been done in the attached Documents "LMI OGN OPS SYST 028 Rev 03, Jan 2025.pdf".

Revised LMI may please be approved.

Submitted by:

नवीन किशोर - अपर महाप्रबंधक

Navin Kishore - 006964 (ADDL. GENERAL MANAGER ,EEMG)
(NAVINKISHORE@NTPC.CO.IN, 9650990460) ,Simhadri

On:23/01/2025(10:32:10) **Ref:**SMTPP/ASH HANDLING/2024-25/CPCLMI/860633

Note No:10

Approved & Submitted by:

समीर शर्मा - मुख्य महाप्रबंधक

Sameer Sharma - 005041 (CGM ,HEAD OF PROJECT)

(SAMEERSHARMA@NTPC.CO.IN, 9650990022) ,Simhadri

On:23/01/2025(11:52:58) **Ref:**SMTPP/ASH HANDLING/2024-25/CPCLMI/860633

NTPC

SIMHADRI

LOCATION MANAGEMENT INSTRUCTION

**MAINTENANCE PAINTING OF STEEL STRUCTURE,
EQUIPMENTS AND PIPELINES IN NTPC SIMHADRI**

LMI/OGN/OPS/SYST/028

ISSUE NO. 3; REVISION NO. 03;

JAN'2025

Approved for Implementation by HOP (SIMHADRI)

LMI APPROVAL DOCUMENTS

1	LMI NAME	MAINTENANCE PAINTING OF STEEL STRUCTURES, EQUIPMENTS AND PIPELINES IN NTPC SIMHADRI
2	LMI No.	LMI/OGN/OPS/SYST/028 ISSUE-3; REV.-03; JAN'2025
3	ReferenceDocument	COS-ISO-00-OGN/OPS/SYST/028
4	SupersededDocument	LMI/OGN/OPS/SYST/028 ISSUE-2; REV.-02; MAY'2023
5	Prepared By	Name: Tanmoy Sinha, DGM(AHD)
6	Checked By	Name: Sandeep Gope, DGM (AHD)
7	Checked By	Name: Rajesh Chawla, AGM(AHD)
8	Reviewed By	Name: Prasanta Kumar Jena, GM (O&M)
9	Approved By	Name: Sameer Sharma, HOP (Simhadri)

INDEX

SL.No.	Particulars	Page No.
1	Introduction	1
2	Scope	1
3	Reference Document	1
4	Superseded Document	1
5	Corrosion Map of India	2
6	Methodology Of Painting of Pre-Painted Surfaces of Steel Structures	2
7	Specific Instructions	4
8	Safety	5
9	Record Keeping	5
10	Review	6
11	Checklist	7
12	Annexure	8-14

TITLE	Maintenance painting of steel structures, equipments and pipelines in NTPC Simhadri
LMI No.	LMI/OGN/OPS/SYST/028 , Rev:03

MAINTENANCE PAINTING OF STEEL STRUCTURES, EQUIPMENTS AND PIPELINES IN NTPC SIMHADRI

1. INTRODUCTION

Brief Description

Simhadri being a coastal plant has lot of corrosion effect. The various structures and equipment get corroded in no time if suitable painting is not applied at the right time. Steel structures pipelines and equipment of Simhadri plant are mostly affected by corrosion due to the saline weather and it requires frequent maintenance painting of the structures.

2. SCOPE

The scope of this LMI is to detail the methods that are to be adopted for corrosion prevention maintenance painting of pre-painted surfaces of steel structure, pipelines, and equipment of NTPC Simhadri Plant.

3. REFERENCE DOCUMENT

COS-ISO-00-OGN/OPS/SYST/028


4. SUPERSEDED DOCUMENT

“MAINTENANCE PAINTING OF STEEL STRUCTURE, EQUIPMENTS AND PIPELINES IN NTPC SIMHADRI” - LMI/OGN/OPS/SYST/028, ISSUE NO. 2 ; REVISION NO. 02; MAY'2023

TITLE	Maintenance painting of steel structures, equipments and pipelines in NTPC Simhadri
LMI No.	LMI/OGN/OPS/SYST/028 , Rev:03

5. CORROSION MAP OF INDIA

Corrosion Map of India as mentioned in COS-ISO-00-OGN/OPS/SYST/028.

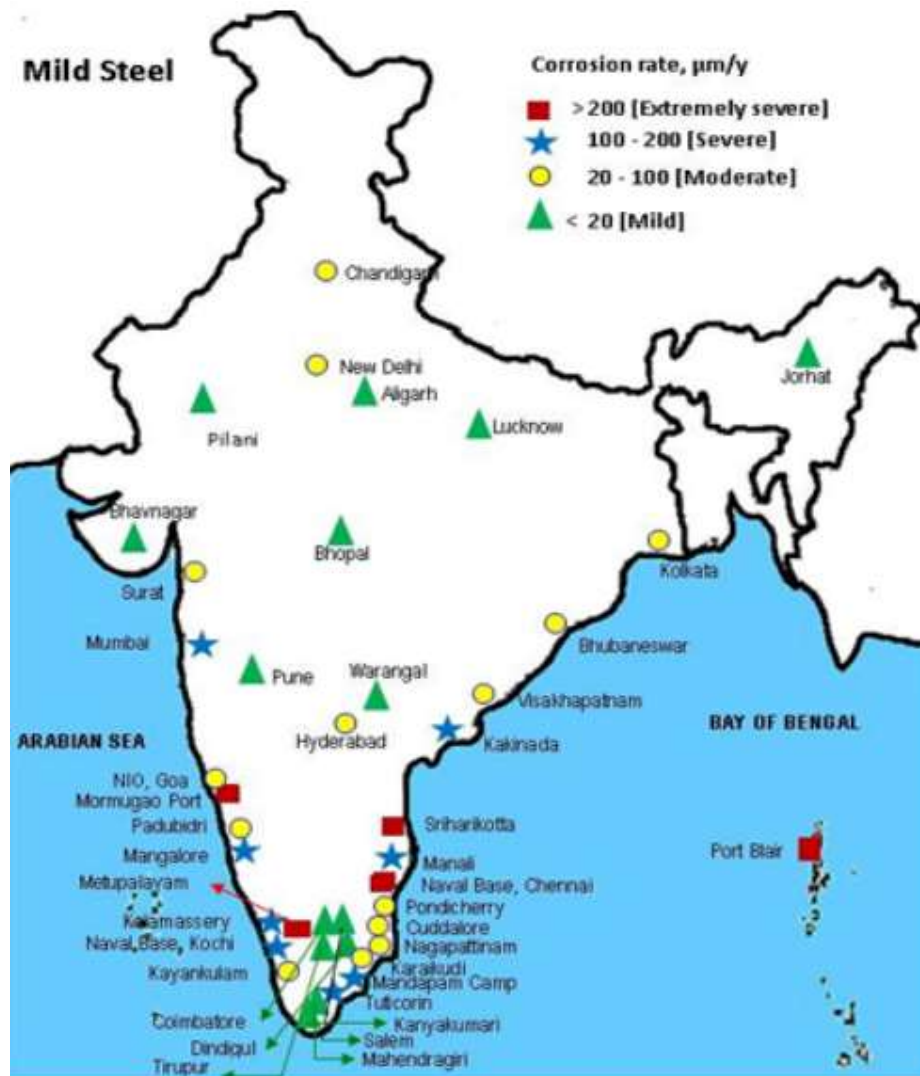

6. METHODOLOGY OF PAINTING OF PRE-PAINTED STEEL STRUCTURES

In an operating industry, maintenance painting is very important and crucial because of its regularity and continuity. The most critical consideration is about the surface preparation which is obviously difficult to execute. In most operating plants, as it is difficult to do the blasting operation in a running plant, an alternate route is always looked for. Like power

TITLE	Maintenance painting of steel structures, equipments and pipelines in NTPC Simhadri
LMI No.	LMI/OGN/OPS/SYST/028 , Rev:03

tool cleaning or manual cleaning. The problem with these types of alternatives is that they cannot remove the old paints and also the well adherent rust from the surface thoroughly or at least to a satisfactory level. Then the problem arises about painting over that surface. Paint systems used in most of these places are two pack epoxy and polyurethane system. Because of cross linking of these polyurethanes while curing, these coatings would not accept over-coatings well after the one week curing period itself. Hence, it is very difficult to expect the normal epoxy and polyurethane coatings to adhere over the aged old coatings. The ideal product required here is a well-established and standard maintenance coating capable of adhering to old adherent coatings. Unfortunately, such successful products are not available in our market. Hence, we are to go in for products like mastics and other surface tolerant coatings. Keeping in mind these limitations, the following recommendations for surface preparation and painting on various likely cases are provided:

Case I Spot repair: This is the early stage of deterioration of paint, where about less than five percent areas are affected. This would require feathering of repainted areas into unpainted areas.

Clean the surface with hand tool cleaning (SSPC-SP 2) or power tool cleaning (SSPC-SP 2). Ensure that the rust is removed thoroughly and that a roughness is created throughout the surface.

Over the prepared surface, a coating acting as tie coat (e.g. surface tolerant epoxy mastic coating, P-4

Refer Part-B: Table- 05 A. Refer COS-ISO-00-OGN/OPS/SYST/028) has to be applied.

After application the above tie coat, by observing an over-coating time, apply relevant top-coat recommended for that area.

Case II Spot repair and full top coat: This is the more advance stage of deterioration of paint, where more than 5 % area is affected. Efforts have to be taken to arrest deterioration at this stage, particularly for areas which are difficult to access, to enhance the overall life of paint system.

Clean the surface with hand tool cleaning (SSPC- SP 2) or power tool cleaning (SSPC – SP 2) or commercial blast cleaning (SSPC- SP 6) and ensure that the deteriorated coating materials are removed thoroughly and also roughness is created throughout the surface.

Apply the coat as described in Case- I ; after observing the over-coating time, apply the top-coat recommended for that area.

Case III Complete repaint: This is the extreme case where most of the areas are deteriorated. In this case complete repaint is required.

Clean the surface as described in Case II.

TITLE	Maintenance painting of steel structures, equipments and pipelines in NTPC Simhadri
LMI No.	LMI/OGN/OPS/SYST/028 , Rev:03

Apply mastic (P-4) (for surface cleanliness SA-2) or Zinc rich epoxy (P-3) (if surface cleanliness is SA 2.5) as primer and apply top coats as per recommended paint system of the part.

(For P-3, P-4 details please Refer COS-ISO-00-OGN/OPS/SYST/028 (NETRA))

7. SPECIFIC INSTRUCTIONS

- Corrosion zone, based on severity to be prepared for various structures wise and location wise. Responsibility: AHD-CPC, MM, EMD, CHP, AHP depts.
- Rolling plan (Tentative*) for painting works based on corrosion condition to be prepared for Main plant & offsite, EMD, CHP, AHP which covers all the steel structures & equipment in Simhadri plant. Responsibility: MM, AHD-CPC, EMD, CHP, AHP depts.
- Most of the painting works to be executed as per rolling plan. Frequency of painting is regularly reviewed based on condition and corrosion severity. Responsibility: MM, AHD-CPC, EMD, CHP, AHP Depts.
- For contracts of painting, adopt three coat painting system for regular REPAIR painting of steel structures. Responsibility: MM, AHD-CPC, EMD, CHP, AHP
 - ❖ Primer coat with Surface tolerant epoxy mastic - DFT 100-125 microns, Intermediate Coat with MIO (Micaceous iron oxide) – DFT- 100-180 microns, Top Coat with Polyurethane – DFT 40-70 microns. Responsibility: MM, AHD-CPC, EMD, CHP, AHP.

Painting Scheme in NTPC Simhadri is as Follows:

Type of coats	Annual Maintenance painting (3 coat system)
	Trestles, Structures, Tanks, Pipelines
Surface Preparation	Hand tool/ Power tool cleaning
Primer	Surface tolerant Epoxy MASTIC, Or Epoxy Zn phosphate,
Intermediate	Micaceous iron oxide (MIO)
Top/Finish	Aliphatic acrylic polyurethane paint.

- For columns base Plates and columns bottoms up to 0.5 M additional coat of “Coal tar black epoxy paint”, 200 microns thick (DFT) may be applied where ever feasible to avoid damage of structure due to moisture. Responsibility: MM, AHD-CPC, EMD, CHP, AHP.

TITLE	Maintenance painting of steel structures, equipments and pipelines in NTPC Simhadri
LMI No.	LMI/OGN/OPS/SYST/028 , Rev:03

8. SAFETY

The major hazards are toxic material handling and inhalation, fire hazard, working in confined space, poor ventilation, and electric shock.

The applicator should have cover-all, air supplied hood respirators, air supplied masks, dust and organic vapor respirators and, high quality gloves, good electrical grounding, and automatic safety switch at spray guns. Safety recommendation for proper PPE can be found in MSDS.

Strict Adherence to safety during execution of painting works

- A) Before proceeding to the painting work of any structure/equipment/pipelines etc, ensure that all the necessary work permits, isolations, safety permits etc are obtained from the equipment's user department/official. If not, insist for same. **DO NOT DO ANY PAINTING WORK WITHOUT THE PERMITS MENTIONED ABOVE.**
Responsibility: MM, AHD-CPC, EMD, CHP, AHP.
- B) Prior to start of work all the hazards to be identified and job specific analysis to be prepared by EIC and issued to mitigate the risks.
- C) Horizontal works at height (above 1.5 m): Responsibility: MM, AHD-CPC, EMD, CHP, AHP.
 - 1. Double lanyard Full body harness safety belt to be used.
 - 2. Safety belt hooks to be clamped in different places to strong anchor points. Not to be clamped/tied to each other. Safety belts not to be clamped to pipelines, equipment etc.
 - 3. Life-line rope to be provided with at least 25 mm thick.
- D) Vertical works height (above 1.5 m): - Responsibility: MM, AHD-CPC, EMD, CHP, AHP
 - 1. Double lanyard Full body harnesses safety belt to be used.
 - 2. Safety belts hooks to be clamped in different places. Not to be clamped/tied to each other.
 - 3. Fall arrestor to be used with proper arrangements.
 - 4. Guide rope to be used.

All PPEs pertaining to painting works to be used. Ensure presence of Agency supervisors at work locations. Safety nets to be used in all possible locations. Instructions to be given to Painters to not to climb on plant equipment, pipelines and panels etc while painting. Use proper ladders. Painters are to be instructed to follow designated path shown for approaching the location and returning to the ground. Removal of empty paint tins, worker's clothes with stains of paints from the work locations after completion of day's work.

9. RECORD KEEPING: - Responsibility: MM, AHD- CPC, EMD, CHP, AHP

Documentation and records: All the inspection work at various hold points is to be well documented. The daily inspection sheet, any repair work, and issues related to the work,

TITLE	Maintenance painting of steel structures, equipments and pipelines in NTPC Simhadri
LMI No.	LMI/OGN/OPS/SYST/028 , Rev:03

photograph, test results, calibration documents, resolution of disputes. NCR, project summary etc shall be a part of it. The document shall be duly signed by all the stakeholders. Establish a documentation and record keeping system.

In addition to recording the above information, the date of application may be stenciled on the painted area in inconspicuous location. The records to be maintained under this LMI include:

- a) Maintain registers for "Painting Requests" and ensure the compliance of activities.
- b) Hindrance registers, Safety Pep-talks.
- c) Quality tests register as applicable,
- d) Record the date of painting on major structures wherever possible
- e) Monthly consumption of paints
- f) Reports of survey and rectification work carried out
- g) Exception reporting, if any

The Above records are to be maintained by MM, AHP-CPC, EMD, CHP, AHP

10. REVIEW

Codes and Standards: Various standards that are referred to are from NACE, ISO, SSPC, ASTM. GM (O&M) will review & take the approval of competent authority (HOP). The document will be reviewed on 2 yearly basis or earlier, if required.

TITLE	Maintenance painting of steel structures, equipments and pipelines in NTPC Simhadri
LMI No.	LMI/OGN/OPS/SYST/028 , Rev:03

Checklist:

Revision Index (For Changes/Revision)				
SI No.	Rev. No.	Date	Details	Approved by
01	01	25.05.2021	Names & designations changed as per present existing in 'LMI approval document' sheet	
02	02	11.04.2023	Review period changed to 2 years, - - External Audit Points	
03	02	11.04.2023	Reviewing authority changed from GM(Mtnc) to GM(O&M) – External Audit Points	
04	02	11.04.2023	CHP, EMD, AHP rolling plan incorporated.	
05	02	15.05.2023	In compliance record first column header changed to area.	
06	02	15.05.2023	Corrosion Map of India included	
07	03	16.01.2025	External Audit point compliance	
08	03	16.01.2025	Format Changed to Format as per LMI/OIN/GEN/002 Rev:04	

TITLE	Maintenance painting of steel structures, equipments and pipelines in NTPC Simhadri
LMI No.	LMI/OGN/OPS/SYST/028 , Rev:03

Annexure 1:

Distribution List			
SI No.	Date of Issue	Issued to	Copy no.
01		GM (O&M)	Email distribution
02		AGM(FM)	Email distribution
03		AGM(MNTC)	Email distribution
04		AGM (AHD, EMD, CHP)	Email distribution

TITLE	Maintenance painting of steel structures, equipments and pipelines in NTPC Simhadri
LMI No.	LMI/OGN/OPS/SYST/028 , Rev:03

Annexure 2:

Compliance Record		
AREA	ACTIVITY	COMPLIANCE

TITLE	Maintenance painting of steel structures, equipments and pipelines in NTPC Simhadri
LMI No.	LMI/OGN/OPS/SYST/028 , Rev:03

Annexure 3:
Tentative rolling plan with frequency of Painting (in years) in NTPC Simhadri of Main plant & Offsite Area based on severity of corrosion


SI No	Stage – I Area	Frequency (In Years)
1	Sea water jetty area(Stage 1)	5*
2	Sea water makeup lines near CT(Stage -1)	5*
3	Sea water makeup lines near desilting basin (Stage-1) opposite to Stage-I CTs	1
4	Sea water makeup lines on bridge located outside EDP compound wall	2
5	Seawater makeup, Sweet water cross country lines	3
6	All Pump houses- Pipelines, pumps, equipments, trestles, support structure etc	2
7	Seawater Pump house- Pipelines, pumps, equipment, trestles, support structures etc	1
8	Condensate storage tanks (Stage - 1)	3
9	All Tops of Storage tanks	1
10	DM plant equipment, tanks (Stage- 1)	2
11	DM plant – Alkaline & Acid tanks (Stage- 1)	1
12	Coal mills and Feeders (Stage-1)	3
13	Boiler Structure & equipment (Stage -1)	3
14	Boiler – Bottom Ash Hopper (Stage -1)	1
15	ESP (Stage -1)	3
16	ESP Area- Wetting units (Stage - 1)	1
17	TG (Stage -1)	4
18	Trestle structures, Pipe lines in Trestles near & around CTs and DM Plant	1
19	EDP – Pipelines, pumps, equipment, trestles, support structures etc	1
20	Trestles structures, Pipe lines on Trestles other than above mentioned	3
21	Fire water System	As per requirement based on site condition
*Since the painting was done by supply and apply contract with 5 years guarantee period Note: Frequency period of painting is based on actual site condition, it may vary from time to time		

TITLE	Maintenance painting of steel structures, equipments and pipelines in NTPC Simhadri
LMI No.	LMI/OGN/OPS/SYST/028 , Rev:03

Tentative rolling plan with frequency of Painting (in years) in NTPC Simhadri of Main plant & Offsite Area based on severity of corrosion



SI No	Stage – II Area	Frequency (In Years)
1	Sea water jetty area(Stage 2)	5*
2	Sea water makeup lines cross country	2
3	Sea water make up lines (Stage 2) on bridge located outside EDP compound wall	2
3	All pump houses, pipelines, Equipment, support structures (Stage - 2)	2
4	Boiler Structure & equipment (Stage - 2)	3
5	ESP (Stage – 2)	3
6	TG (Stage -2)	4
7	Trestle structures, Pipe lines on Trestles near & around CTs and DM Plant (Stage - 2)	1
8	Trestle structures, Pipe lines on trestles other than above mentioned	3
9	DM plant equipment, Tanks (Stage - 2)	2
10	Fire water System	As per requirement based on site condition
11	Emergency and unforeseen requirements	

TITLE	Maintenance painting of steel structures, equipments and pipelines in NTPC Simhadri
LMI No.	LMI/OGN/OPS/SYST/028 , Rev:03

Tentative rolling plan with frequency of Painting (in years) in NTPC Simhadri of CHP Area based on severity of corrosion



SI No	Stage – I Area	Frequency (In Years)
1	Stage-1 Paddle Feeders	4 Years
2	Trippers # 1,2,3,4	4 Years
3	Crusher House Equipment	4 Years
4	Track Hopper-1	3 Years
5	Unit-2 Bunker Floor & Conv-10A/B Gallery Internals	3 Years
6	Pent House-1	2 Years
7	Conv-1A/B and Conv-2A/B Gallery Internal	2 Years
8	Crusher House-1	2 Years
9	Crusher House-1 to TP-13	2 Years
10	TP-1 , TP-2, TP-3, TP-4	2 Years
11	TP-5 ,TP-6, TP-7,TP-8 ,TP-9	2 Years
12	Conv-3A/B ,Conv-4A/B, Conv-5A/B Gallery Internals	2 Years
13	Conv-6A/B ,Conv-7A/B, Conv-8A/B Gallery Internals	2 Years
14	Unit-1 Bunker Floor & Conv-9A/B Gallery Internals	2 Years
15	TP-10, TP-11, TP-12	2 Years
16	Stacker-Reclaimer-1	2 Years
17	Stacker-Reclaimer-2	2 Years
18	Conv-11A/B, 12A/B, Con-13A/B Gallery Internals	2 Years
19	Stage-1 area 'Fire Lines'	2 Years
20	Stage-1 area 'Cable trestles'	2 Years
Note: Frequency period of painting is based on actual site condition, it may vary from time to time		

TITLE	Maintenance painting of steel structures, equipments and pipelines in NTPC Simhadri
LMI No.	LMI/OGN/OPS/SYST/028 , Rev:03

Tentative rolling plan with frequency of Painting (in years) in NTPC Simhadri of CHP Area based on severity of corrosion -Resp CHP



SI No	Stage – II Area	Frequency (In Years)
1	Trippers # 5,6,7,8	4 Years
2	Crusher House Equipment	4 Years
3	Stage-2 Paddle Feeders	4 Years
4	Unit-3 Bunker Floor & Conv-23A/B Gallery Internals	3 Years
5	Unit-4 Bunker Floor & Conv-24A/B Gallery Internals	3 Years
6	Dozer Shed, Other Sheds and Misc Painting	3 Years
7	Track Hopper-2	2 Years
8	Pent House-2	2 Years
9	Conv-15A/B Gallery Internals	2 Years
10	Crusher House-2	2 Years
11	Con-16A/B, 17A/B Gallery & TU's Internals	2 Years
12	TP-18, TP-19, TP-20, TP-21	2 Years
13	Conv-28, 29, 30 Gallery	2 Years
14	Conv-18A/B, 19A/B, 20A/B, 21A/B, 22A/B Gallery Internals	2 Years
15	TP-22, TP-23, TP-24, TP-25	2 Years
16	TP-26, TP-27, TP-28	2 Years
17	Stacker Reclaimer-3	2 Years
18	Stacker Reclaimer-4	2 Years
19	Conv#25A/B, 26A/B, 27A/B Gallery Internals	2 Years
20	Stage-2 area 'Fire Lines'	2 Years
21	Stage-2 area 'Cable trestles'	2 Years
22	Emergency and unforeseen requirements	

SI No	Wagon Tippler areas	Frequency
1	Wagon Tippler-1&2 and Conv-14A/B Gallery Internals & Cable trestles	2 Years

TITLE	Maintenance painting of steel structures, equipments and pipelines in NTPC Simhadri
LMI No.	LMI/OGN/OPS/SYST/028 , Rev:03

Tentative rolling plan with frequency of Painting (in years) in NTPC Simhadri of EMD Area based on severity of corrosion -Resp EMD



SI No	Area	Frequency (In Years)
1	Equipment and switch gears in Sea Water Pump house	1 Years
2	All Outdoor Equipment	2 Years
3	All Indoor Switchgear and equipment	5 years

Tentative rolling plan with frequency of Painting (in years) in NTPC Simhadri of AHD Area based on severity of corrosion -Resp AHD



SI No	Area	Frequency (In Years)
1	All ADL lines & equipment	2 Years
2	Trestles carrying ADL lines	2 Years
3	Trestles carrying conveying lines	2 Years
4	Silo Structures	2 Years